

Warrior, Inc. 11100 SW Industrial Way Tualatin, OR 97062

Phone: (888) 220-6861 Fax: (503) 692-0364


<u>customerservice@warriorproducts.com</u> www.warriorproducts.com

RAINGUTTER MOUNT KIT FOR WARRIOR PLATFORM RACKS

P/N 10835

IMPORTANT INSTALLATION NOTES:

- Factory rack components may interfere with the Warrior Products Platform rack. In most
 cases the factory side rails (running front-to-back) may be left on the vehicle without
 interference. The factory crossbars (running side-to-side) should be removed for most
 applications. Check for factory roof rack and Warrior Products Platform system
 compatibility before fully installing the Platform system. Remove factory rack
 components as necessary to eliminate interference.
- Warrior Products Rain Gutter Mounts come pre-assembled, but the hardware will likely need to be loosened for installation, depending on your application. These gutter mounts are designed to work with Warrior Platforms and Safari Baskets but they can be made to fit with many other brands and style of platform/basket.

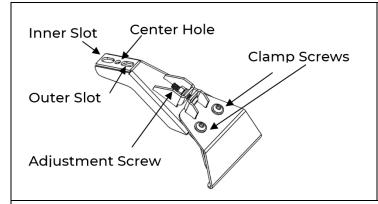

- 1. Prepare the mounts for installation by loosening the Clamp Screws (2 per mount) and the Adjustment Screw (1 per mount) so that the mount will open enough to fit over the rain gutter of the vehicle. In some cases the mounts may need to be partially disassembled in order to fit the mount clamp over the rain gutter. (If all mounts are not assembled, assemble them to match the figure to the left)
- 2. Use the supplied rubber edge trim installed on the edge of the large inside piece of the mount (the edge that will sit inside the rain gutter channel) whenever possible. You may install the mounts without the rubber edge trim if more grip range is required to clamp the rain gutter.
- 3. Position the mounts along the length of the rain gutter channel so that they are equally distributed along the rain gutter channel. Keep in mind, the general location of the mounting points on your platform/basket when initially positioning the gutter mounts.
- 4. Position your platform/basket on the roof of the vehicle using wooden blocks or other support. Adjust the placement of the platform/basket until it fits the vehicle profile to your liking. When positioning the platform/basket on the roof keep track of thing like sun roof operation, antennas, tailgate movement, etc that may interfere with the rack.





5. Adjust the position of the mounts by sliding them gently along the rain gutter channel until they are lined up with the mounting points on your platform/basket. Loosely install the hardware that attached your platform/basket to the mounts. Mounting position will vary greatly depending on the vehicle application and the type/size of platform/basket being installed on the mounts.



- 6. Loosely attach the basket/platform to the gutter mounts. Do not tighten hardware at this time. Check the position of the platform/basket to make sure the loaction is correct.
- 7. Tightne the adjuster screws on all gutter mounts in two passes, then tightned the clamp screws on all mounts in two passes. The gutter mounts are now locked in place.
- 8. Ensure the platform/basket has not shifted. You may now tighten the hardware attaching the platform/basket to the gutter mounts. At this point, check all hardware to ensure nothing has come lose during installation.

If you need further assistance installing your product, please contact us by email at customerservice@warriorproducts.com or call us at (888) 220-6861.



